

# Internal venetian blind


Information at a glance



*Der SonnenLichtManager*



## Internal venetian blind

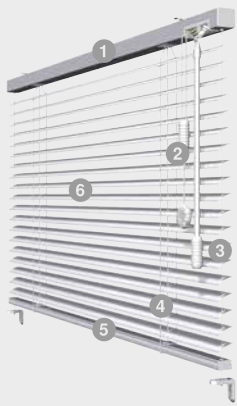

- 1 Top rail (different dimension depending on type)
- 2 Cord with handle (raising and lowering the sun shading product)
- 3 Tilt rod (for tilting the slats)
- 4 Tilting tape
- 5 Bottom rail (different dimension depending on type)
- 6 Slats



## ► The benefits for you

- Precise control of brightness via flexibly adjustable slats
- The colours of slats and aluminium parts are harmoniously adapted to one another
- Optional lateral guidance of the sun shading product
- Convenient locking mechanism in any position
- Thermal protection in summer, view out, glare control and visual privacy depending on selected sun shading product
- Slat threading between the webs (depending on type)

## ► Features

- Construction limit values (depending on type and operation):
  - max. width: 4,000 mm
  - max. height: 4,000 mm
  - max. area: 16 m<sup>2</sup>
- Slat width: 16, 25, 35, 50 mm
- Operation: titling, raising and lowering with cord/rod, ball chain, crank, 24 V or 230 V motor (depending on type)
- Fields of application: for windows, doors, vertical or inclined surfaces, large surfaces, windows with special shapes (triangles, trapezoids), computer workstations
- Installation: on the wall, the ceiling, in front of and in the reveal